

## Revolabs HD Single / Dual Channel System — Sony XG-80 Setup Guide

---

This setup guide will guide you through the steps needed to properly connect a Revolabs HD Single or Dual Channel System to a Sony XG-80 video codec.

**Note:** *It is important to carefully follow these instructions in order and completely. Otherwise your Revolabs Microphone System and/or the video codec may not function properly. Please read through these instructions completely before proceeding. Contact Revolabs technical support if you have any questions.*

### **Requirements for connecting systems:**


1. Revolabs HD Single or Dual Channel System
2. Sony XG-80 video codec
3. QTY 1 3.5mm unbalanced male to 3.5mm unbalanced male cable\*

\* 07-35MUTO35MU-01 3.5mm unbalanced male to 3.5mm unbalanced male cable available from Revolabs

## Connecting the Cables

---

1. Insert the unbalanced 3.5mm male connector to the CH 1 OUT port on the Revolabs Single or Dual Channel System. If using a Single Channel, DIP Switch #1 should be "OFF". If using a Dual Channel, DIP Switch #1 should be "ON".
2. Insert the other 3.5mm male connector into the "MIC (A1/A3) 1R" port on the Sony XG-80.
3. Verify that DIP Switch #3 (mic/line) is "ON"

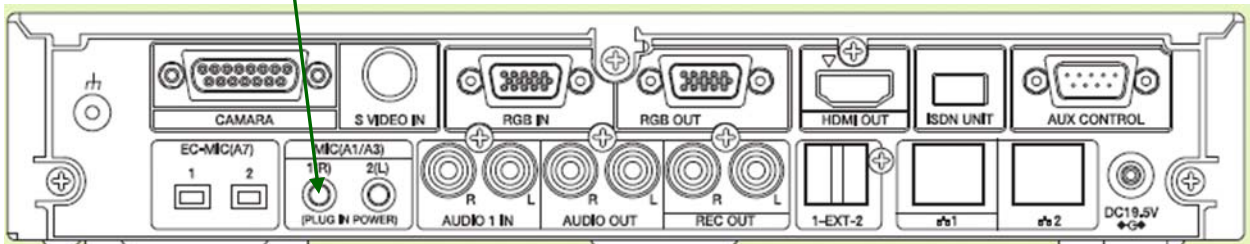

## Configuring the Sony XG-80 Video Codec

---

1. Push the TOOLS button on the remote control
2. Select SETUP
3. Select AUDIO 1
4. Select AUDIO INPUT as MIC
5. Verify that Mic (A1/A3) has a checkmark
6. Turn ECHO CANCELLER to ON